


STMD M40-320 SDUCR

Vibration damped turning tool holder - Solid Body



MAQ AB

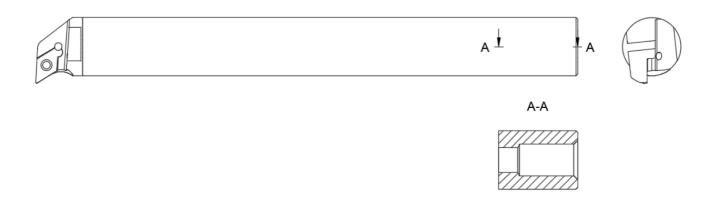

Price and dimensions

More technical data on page 2

Diameter (mm)	Length (mm)	Price USD	Price EUR
40	320	\$ 850	€ 765

Description:


STMD turning tool holder

Supplied with:

insert Insert key Note:

Cylindrical shank without clamping feature. With central groove for alignment. Recommended application ranges up to 6XD Reference product performance datasheet bellow.

Maximum cutting depth (To be updated) mm.

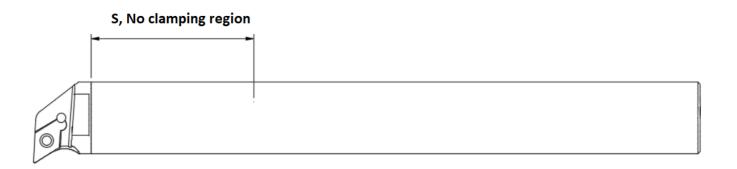

Download drawing







Technical data	
Adaptive interface machine direction	40 mm
No clamping region (S)	87 mm
Recommended maximum overhang (OHX)	Approx. 240 mm
Coolant entry form	Axial concentric
Coolant exit form	1C – Axial
Coolant entry thread size	G ½
Max coolant pressure	70 bar
Alignment aid property	Flat surface on cutter head
Connection diameter (DCON)	40 mm
Functional length (LF)	320 mm
Body material	Steel
Weight of item	2.4 kg
Recommended clamping length	120 mm (3XD)
Method of cutting off	Slot turning / Sawing



Quality / Product performance reference*

Depth of cut: Cutter head: Coolant: 0.5 mm MAQ SDUCR 40

Nose radius: Cutting insert: Workpiece material: 0.4 mm DCMT 11T304 34 CrNiMo, HRC 28-30

Units: Feed: mm/rev; Speed: m/min; Ra: μm



Quiet with good/medium surface quality



Slight to medium vibrations with medium to bad surface quality



Strong vibrations / Insert broken

Surface finish (Ra) table

4xD DOC = 0.5mm

Feed Speed	0.10	0.15	0.20
200	1.44	2.14	3.03

5xD DOC = 0.5mm

Speed	Feed	0.10	0.15	0.20
	200	1.15	2.01	2.63

6xD DOC = 0.5mm

Feed Speed	0.10	0.15	0.20
200	1.20	2.11	2.53

(RA) = Arithmetic Average of the roughness profile (μ m)

^{*} The actual product performance is dependent on the rigidity of the clamping methods, and the table is used as reference