

STMD STMD i1/2-5.7 Product sheet

STMD STMD i1/2 5.7

Vibration damped turning tool holder - modular







www.maqab.com I info@maqab.com

Order product here



Price and dimensions

More technical data on page 2

Diameter (inch)	Length (inch)	
1/2	5.7	


Description:

STMD turning tool holder

Supplied with:

Insex screws M2X8, 3 pcs Allen wrench, 1 pcs Note:

Cylindrical shank without clamping feature. With central groove for alignment. Recommended application range up to 8XD Refer to product performance datasheet to be updated. Maximum cutting depth (To be updated) mm.

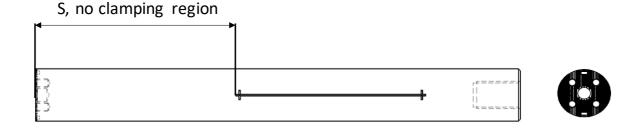



Technical data	
Adaptive interface machine direction	½ inhc
Adaptive interface workpiece direction	SL12
No clamping region (S)	2 inch
Recommended maximum overhang (OHX)	Approx. 3.8 inch
Coolant entry form	Axial concentric
Coolant exit form	3C – axial and periphery
Max coolant pressure	70 bar
Alignment aid property	Central groove
Connection diameter (DCON)	¹∕₂ inch
Functional length (LF)	5.7 inch
Body material	Carbide reinforced steel
Weight of item	0.18 kg
Recommended clamping length	1.5 inch (3XD)
Method of cutting off	EDM Wire cutting




Quality / Product performance reference*

Depth of cut: Cutter head: Coolant: Units: 0.5 mm Nose MAQ SDUCR 16 Cutti On Work Feed: mm/rev; Speed: m/min; Ra: µm

Nose radius: Cutting insert: Workpiece material: 0.4 mm DCMT 070204 34 CrNiMo, HRC 28-30




Surface finish (Ra) table

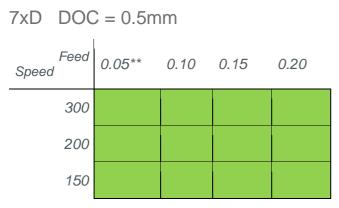

8xD	DOC :	= 0.5mm

Feed Speed	0.05**	0.10	0.15	0.20
300				
200				
150				

9xD DOC = 0.5mm

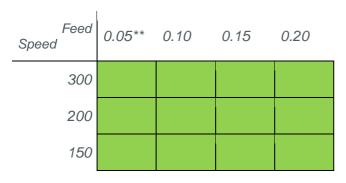

* The actual product performance is dependent on the rigidity of the clamping methods, and the table is used as reference

****** In actual machining, avoid using depth of cut or feed rate below 0.07mm when working with carbide insert (the edge radius)



www.maqab.com I info@maqab.com

Order product here